



Consolidated* Condensed Catalog

Pressure Relief Solutions

- Safety Relief Valves
- Safety Valves

A extensive range of safety relief valve and safety valve styles, sizes, options and configurations for multiple applications, environments and media.



Table of Contents

- Safety Relief Valves4**
 - Type 1900 5
 - Type 1900-UM 6
 - Type 11000 7
 - Type 19000 7
 - Type 1982 8
 - Type 2478 Relief Valve 8
 - Type 2900 Pilot-Operated 9
 - Type 2900-40 Pilot-Operated 9
 - Type 3900 Pilot-Operated 10
 - Type 4900 Pilot-Operated 10
 - Type 13900 Pilot-Operated 10

- Safety Valves 11**
 - Type 1700 Maxiflow* 12
 - Type 2700 12
 - Type 1811 13
 - Type 1511 13
 - Type 1541-3, 1543-3 14
 - Type 1900/P 14

- Electromatic Ball Valve System 15**
 - Type 3500-5 Electromatic* Ball Valve 15

Consolidated Safety Relief Valves

In compliance with:

- ASME Section VIII Process Application Standards
- ASME Section I Boiler Application Regulations
- Many other Global and Regional Standards

Safety relief valves often serve as the point-of-protection against potentially dangerous circumstances, so it is important that they be dependable. BHGE's Consolidated safety relief valves have maintained a reputation for excellence and reliability for more than a century.

The Consolidated product line has demonstrated a number innovative solutions, too. Safety relief valve innovations from the product line include the Thermodisc® temperature compensating disc and the first modular pilot-operated valve.

A full range of valves

BHGE provides a full range of Consolidated safety relief valve styles, sizes, options and configurations for multiple industries, applications, environments, and media. From spring-actuated to pilot-operated, each pressure relief valve is configured to offer safer process flow control in harsh environments.

Meeting evolving needs

BHGE continues to pursue quality and pro-active approach through regular collaboration with our customers and by staying actively involved in the development of regulatory compliance standards. We configure, engineer, and manufacture safety relief valves that adhere to industry regulations and global and regional standards while helping meet our customers' evolving needs.



Applications:

- Chemical and petrochemical
- Refinery
- Power generation
- Commercial
- MSR – Moisture Steam Re-heater
- Turbine gland steam seal
- Pegging steam/auxiliary steam
- De-aerators
- Feed-water heaters – tube side and shell side
- Pumps – recirculation line protection
- Fuel oil pumps
- Ammonia systems
- Scrubber systems
- Air compressor
- Miscellaneous pumps
- Trim supplied to match the fluid



Type 1900 Safety Relief Valve

Inlet Sizes:	1" through 12"
Inlet Ratings:	ASME Class 150 through 2500
Outlet Sizes:	2" through 16"
Outlet Ratings:	ASME Class 150 and 300
Orifice Sizes:	D through W
Set Pressure Range:	4 psig to 6250 psig
Temperature Range:	-450°F to 1500°F
Materials:	Cast carbon steel body with stainless steel trim
Certifications:	ASME B&PVC Section III and VIII PED China Manufacturing License (CML) API 520, 521 and 526 NACE Others available upon request

The highly adaptable type 1900 safety relief valve meets numerous application requirements.

Options for Type 1900 Safety Relief Valve

1900-30

The type 1900-30 valve includes the addition of a balanced bellows that is necessary to compensate for the effects of variable back pressure. By isolating the upper structure and allowing the use of less expensive materials, the bellows is also a cost-effective solution in applications where the valve is exposed to highly viscous or corrosive fluids.

1900-DA

The type 1900-DA valve contains an additional O-ring seat seal. This soft seat is the primary seal and it allows the valve to remain leak free at 95 percent of set pressure over 100 psig (6.89 barg). A backup metal seat provides additional safety for fire-relief applications when O-rings can be destroyed by high temperature exposure.

The type 1900-DA O-ring seat is available for set pressures up to 6250 psig (430.92 barg). Some soft seats offered by other manufacturers are limited to 1500 psig.

Consolidated Safety Relief Valves



Type 1900-UM Safety Relief Valve

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: D through W

Set Pressure Range: 4 psig to 6250 psig

Temperature Range: -450°F to 1500°F

Materials: Cast carbon steel body with stainless steel trim

Certifications: ASME B&PVC Section III and VIII
PED
China Manufacturing License (CML)
API 520, 521 and 526
NACE
Others available upon request

The type 1900-UM valve is capable of flowing liquid, gas or steam with no adjustment required to switch between different media with the same set pressure.

Options for Type 1900-UM Safety Relief Valve

1900-30-UM

The type 1900-30-UM valve includes the addition of a balanced bellows that is necessary to compensate for the effects of variable back pressure. By isolating the upper structure and allowing the use of less expensive materials, the bellows is also a cost-effective solution in applications where the valve is exposed to highly viscous or corrosive fluids.

1900-UM-DA Soft Seat

The type 1900-UM-DA soft seat contains an additional soft seal. This soft seat is the primary seal, and it allows the valve to remain leak free at 95 percent of set pressure over 100 psig (6.89 barg). A backup metal seat provides additional safety for fire-relief applications when soft goods can be destroyed by high temperature exposure. The Consolidated type 1900-UM soft seat is available for set pressures up to 6250 psig (430.92 barg). Some soft seats offered by other manufacturers are limited to 1500 psig.



Type 11000 Safety Relief Valve

Inlet Sizes:	0.5" - 0.75" - 1"
Inlet Ratings:	Threaded
Outlet Sizes:	1", standard
Outlet Ratings:	Threaded
Orifice Sizes:	0.132 sq. in. and 0.246 sq. in.
Set Pressure Range:	75 psig up to 2000 psig
Temperature Range:	-20°F to 600°F (will vary based on material selection)
Materials:	Carbon steel (standard), Stainless steel
Certifications:	ASME B&PVC Section VIII

11000 Series Safety Relief Valve combines performance, quality, reliability and value into a single overpressure device. The 11000 SRV is specifically designed for the most demanding upstream and midstream oil and gas applications where safety is of prime importance.



Type 19000 Safety Relief Valve

Inlet Sizes:	0.5" to 2"
Inlet Ratings:	Threaded and ASME Class 150 through 2500"
Outlet Ratings:	Threaded and ASME Class 150 to 300
Orifice Sizes:	0.096 sq. in. through 0.567 sq. in.
Set Pressure Range:	5 psig to 8000 psig
Temperature Range:	-425°F to 1100°F
Certifications:	ASME B&PVC Section III and VIII PED China Manufacturing License (CML) API 520 and 521 NACE Others available upon request

The type 19000 safety relief valve is ASME and PED certified. It meets and exceeds API seat tightness performance. The 19000 offers enhanced capacity and blowdown performance on many media types. In most cases, it does not require parts changes to accommodate different media.

Options for Type 19000 Safety Relief Valve

19000-MS Standard Design

Metal-to-metal seat construction. Seat tightness compliant with API 527.

19000-DA O-Ring Seat Option

Soft seat design offers bubble tight seats at up to 97 percent of valve set pressure for valves set at 101 psig (6.96 barg) and above. This option promotes higher, more efficient system operating pressures without significant seat leakage concerns.

Consolidated Safety Relief Valves



**Type 1982
Safety Relief Valve**

Inlet Sizes: 0.5" through 2"

Inlet Ratings: Threaded

Outlet Ratings: Threaded

Orifice Sizes: Four sizes - .121 sq. in. through 1.399 sq. in.

Set Pressure Range: 10 psig to 500 psig

Temperature Range: -20°F to 800°F

Materials: Carbon steel bonnet with stainless steel trim

Certifications: ASME B&PVC, Section III
ASME B&PVC, Section VIII, Division I

The type 1982 safety relief valve is a preferred choice for OEM and skid manufacturers requiring high-relief capacity from a small valve. The 1982 offers superior seat tightness and blowdown performance for most media applications.



**Type 2478
Relief Valve**

Inlet Sizes: 0.5" through 2.5"

Outlet Sizes: 0.75" through 2.5"

Inlet Rating: Threaded

Outlet Rating: Threaded

Orifice Sizes: D, E, F, G, H and J

Set Pressure Range: 15 to 300 psig

Temperature Range: -325°F to 406°F

Materials: Cast bronze bonnet, brass base and trim and PTFE soft seats

Certifications: Non-Coded

The type 2478 pressure relief valve features an enclosed design for non-corrosive, thermal relief and liquid service applications.

Consolidated Pilot-Operated Safety Relief Valves



**Type 2900
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Seventeen sizes – D through W

Set Pressure Range: 15 to 6250 psig

Temperature Range: -40°F to 505°F
Above 505°F with heat exchanger

Materials: Stainless steel pilot with carbon steel main valve and stainless steel trim

Certifications: ASME B&PVC Section VIII
PED
China Manufacturing License (CML)
API 520, 521 and 526
(Same centerline-to-face as spring loaded valves)
NACE
Others available upon request

The type 2900 pilot-operated safety relief valve combines the advantages of two products into one—the 1900 safety relief valve and the 3900 POSRV. The 2900 POSRV can replace spring-loaded relief valves without requiring modified outlet piping.



**Type 2900-40
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: D through W

Set Pressure Range: 15 to 5800 psig

Temperature Range: -40°F to 505°F
Above 505°F with heat exchanger

Materials: Carbon steel base and 316 stainless steel internal components; pilot valve 316 stainless steel

Certifications: ASME B&PVC Section I
China Manufacturing License (CML)
API 520 and 521
Others available upon request

The type 2900-40 pilot-operated safety relief valve offers exceptional performance and meets demanding ASME Section I Economizer and Boiler Applications.

Consolidated Pilot-Operated Safety Relief Valves



**Type 3900
Pilot-Operated Safety
Relief Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Fourteen sizes –
D through T
(Full bores)

Set Pressure Range: Full Bores 15 to 6250 psig

Temperature Range: -40°F to 505°F
Above 505°F with heat exchanger

Materials: Stainless steel pilot with
carbon steel main valve
and stainless steel trim

Certifications: ASME B&PVC Section VIII
PED
China Manufacturing
License (CML)
API 520, 521 and 526
NACE
Others available
upon request

The type 3900 pilot-operated safety relief valve is a non-flowing design available in a modulating or pop-action pilot. The 3900 POSRV is suitable for the overpressure protection of many pressurized systems and vessels in the chemical, petrochemical, paper mill, oil and gas production and transmission industries.



**Type 4900
Pilot-Operated Safety
Relief Valve**

Inlet Sizes: 1" to 8"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 10"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Fourteen sizes –
D through T

Set Pressure Range: 15 psig to 7200 psig

Temperature Range: -40°F to 505°F

Materials: Stainless steel pilot
with carbon steel main valve
and stainless steel trim

Certifications: ASME B&PVC Section VIII
PED
China Manufacturing
License (CML)
API 520 and 521
NACE
Others available
upon request

The type 4900 pilot-operated safety relief valve is a tubeless valve for oil and gas production and the offshore industry.



**Type 13900
Pilot-Operated Safety
Relief Valve**

Inlet Sizes: 16" to 20"

Inlet Ratings: ASME Class 300

Outlet Sizes: 18" through 24"

Outlet Ratings: ASME Class 150

Orifice Sizes: 114, 143.1, 176.7
and 201 sq. in.

Set Pressure Range: 50 psig to 300 psig

Temperature Range: 250°F to 550°F

Materials: Carbon Steel with
Stainless Steel trim

Typical Application: Moisture Separator
Reheater Systems

Certifications: ASME B&PVC Section VIII
PED
China Manufacturing
License (CML)
API 520 and 521
Others available
upon request

The type 13900 pilot-operated safety relief valve is configured for high-capacity steam overpressure protection for moisture separator reheater systems.

Consolidated Safety Valves

In compliance with:

- ASME Section I Code for Boiler Applications

Since 1879, BHGE's Consolidated safety valves have been known for exceptional quality, performance and dependability. Because safety valves play an important role in keeping people and equipment safe, it is important that they be reliable in even the most demanding real-world applications. That's why BHGE works closely with our customers and regulatory organizations to configure, engineer, and manufacture safety valves that can help maintain safer operating conditions in a full range of environments.

Key valve features

Our comprehensive portfolio of safety valves can help to run operations smoothly and cost effectively, particularly in steam service environments. Consolidated safety valves feature a unique pop-action release that can relieve steam over-pressurization if pressures upstream from the valve reach a set point.

What is more, BHGE's Consolidated safety valves comply with the ASME Section I code for boiler applications. They are built with many features that meet ASME requirements for steam-compressible fluids. For example, all models feature a lifting lever, required by the code for testing, instead of deadweight or weighted levers. Consolidated safety valves can also withstand set pressures up to 103 percent with a blowdown value of 4 percent, or 96 percent of set pressure drop before the valve re-seats.

A full range of valves

With a range of styles, models, options and configurations, Consolidated safety valves work in many different boiler applications.

Applications:

- Economizer
- Drum
- Superheater main steam line
- Power actuated relief valve
- Cold re-heater line
- Hot re-heater line
- Soot blowers in forced flow steam generators
- Organic fluid vapor generators
- High temp hot water generators
- Electric boilers
- Waste heat recovery boilers



Consolidated Safety Valves



**Type 1700
Maxiflow* Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 600 through 4500 Flanged and BWE

Outlet Sizes: 3" through 10" flanged

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Eleven sizes – 1 through RR

Set Pressure Range: 100 psig to 5800 psig

Temperature Range: Up to 1200°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII
PED
China Manufacturing License (CML)
Others available upon request

The 1700 Maxiflow high-pressure safety valve is a premium product that is installed on a majority of power generating stations worldwide to help protect boilers from overpressure conditions.



**Type 2700
Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 600, 900 and 1500

Outlet Sizes: 3" through 8"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Seven sizes – 1 through Q

Set Pressure Range: 100 psig to 1600 psig

Temperature Range: Up to 1050°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII
PED
China Manufacturing License (CML)
Others available upon request

The type 2700 safety valve is configured to meet the specific requirements of the cogeneration and waste-to-energy markets.



**Type 1811
Safety Valve**

Inlet Sizes: 1.25" through 6"

Inlet Ratings: ASME Class 300 and 600

Outlet Sizes: 1.5" through 8"

Outlet Ratings: ASME Class 150

Orifice Sizes: Ten sizes – F through Q

Set Pressure Range: 15 psig to 725 psig

Temperature Range: Up to 1000°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII
PED
China Manufacturing License (CML)
Others available upon request

The type 1811 safety valve is a cost-effective, high-capacity, flanged-steel safety valve for steam service.



**Type 1511
Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 250

Outlet Sizes: 2.5" through 4"

Outlet Ratings: ASME Class 125

Orifice Sizes: Eight sizes – H through Q

Set Pressure Range: 15 psig to 250 psig

Temperature Range: -20°F to 420°F

Materials: Cast iron body with brass trim

Certifications: ASME B&PVC Section I and VIII
PED
China Manufacturing License (CML)
Others available upon request

The type 1511 safety valve is configured for low pressure, steam heating boilers and steam generators as well as air service applications.

Consolidated Safety Valves



Type 1541-3, 1543-3
Safety Valve

Inlet Sizes: 0.5" through 2.5"

Outlet Sizes: 0.75" through 2.5"

Inlet Rating: Threaded

Outlet Rating: Threaded

Orifice Sizes: D, E, F, G, H and J

Set Pressure Range: 15 to 350 psig

Temperature Range: -20°F to 420°F

Materials: Cast iron bonnet with brass base and trim

Certifications: ASME B&PVC Section I and VIII

The type 1541 and 1543 safety valves are configured for steam and other compressible fluids. Compression media is limited to non-toxic, non-flammable, non-corrosive service. These valves are most commonly used in pharmaceutical and process plants.



Type 1900/P
Safety Valve

Inlet Sizes: 1" through 8"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 10"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: D through T


Set Pressure Range: 5 to 6000 psig

Temperature Range: -20°F to 850°F

Certifications: ASME B&PVC, Section I
(Steam Service)
API 520 and 527
Others available upon request

The type 1900/P safety valve is designed to meet Economizer and Organic fluid applications.

Consolidated Electromatic* Ball Valve System

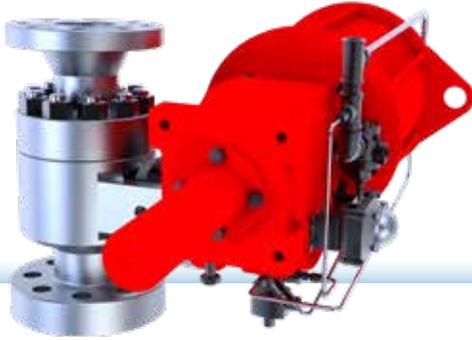

3500-5 Series EBV Electromatic* Ball Valve System

Inlet Sizes: 1.5" / 2" / 2.5" / 3" / 4"

Inlet Ratings: ASME Class 1500, 2500, 3100 and 4500

Outlet Sizes: 3" / 4" / 6"

Outlet Ratings: ASME Class 300 and 900

Bore sizes: 0.875" / 1" / 1.75" / 2" / 2.5" / 3"
(Reduces bore sizes available without ASME V stamp.)

Set Pressure Range: 50 psig to 6000 psig

Temperature Range: up to 1150°F

Materials: Alloy steel body with Colmonoy® coated
inconel alloy ball and seat assembly

Certifications: ASME B & PVC Section I 'V' code stamp on once
through boilers (full bore only) and non-code section I

The 3500-5 EBV Series offers automatic or manual overpressure protection for steam boiler systems, and can also be used to assist start-up and shut-down venting. The new enhanced design includes a superior coating and manufacturing process that enhances leak free performance, and improves reliability and increases valve life.

DIRECT SALES OFFICE LOCATIONS

AUSTRALIA

Brisbane:
Phone: +61-7-3001-4319
Fax: +61-7-3001-4399

Perth:
Phone: +61-8-6595-7018
Fax: +61-8-6595-7299

Melbourne:
Phone: +61-3-8807-6002
Fax: +61-3-8807-6577

BELGIUM

Phone: +32-2-344-0970
Fax: +32-2-344-1123

BRAZIL

Phone: +55-19-2104-6900

CHINA

Phone: +86-10-5738-8888
Fax: +86-10-5918-9707

FRANCE

Courbevoie
Phone: +33-1-4904-9000
Fax: +33-1-4904-9010

GERMANY

Ratingen
Phone: +49-2102-108-0
Fax: +49-2102-108-111

INDIA

Mumbai
Phone: +91-22-8354790
Fax: +91-22-8354791

New Delhi

Phone: +91-11-2-6164175
Fax: +91-11-5-1659635

ITALY

Phone: +39-081-7892-111
Fax: +39-081-7892-208

JAPAN

Tokyo
Phone: +81-03-6871-9008
Fax: +81-03-6890-4620

KOREA

Phone: +82-2-2274-0748
Fax: +82-2-2274-0794

MALAYSIA

Phone: +60-3-2161-0322
Fax: +60-3-2163-6312

MEXICO

Phone: +52-55-3640-5060

THE NETHERLANDS

Phone: +31-15-3808666

RUSSIA

Veliky Novgorod
Phone: +7-8162-55-7898
Fax: +7-8162-55-7921

Moscow

Phone: +7 495-585-1276
Fax: +7 495-585-1279

SAUDI ARABIA

Phone: +966-3-341-0278
Fax: +966-3-341-7624

SINGAPORE

Phone: +65-6861-6100
Fax: +65-6861-7172

SOUTH AFRICA

Phone: +27-11-452-1550
Fax: +27-11-452-6542

SOUTH & CENTRAL AMERICA AND THE CARIBBEAN

Phone: +55-12-2134-1201
Fax: +55-12-2134-1238

SPAIN

Phone: +34-93-652-6430
Fax: +34-93-652-6444

UNITED ARAB EMIRATES

Phone: +971-4-8991-777
Fax: +971-4-8991-778

UNITED KINGDOM

Bracknell
Phone: +44-1344-460-500
Fax: +44-1344-460-537

UNITED STATES

Jacksonville, Florida
Phone: +1-904-570-3409

Deer Park, Texas

Phone: +1-281-884-1000
Fax: +1-281-884-1010

Houston, Texas

Phone: +1-281-671-1640
Fax: +1-281-671-1735

bhge.com

*Denotes a trademark of Baker Hughes, a GE company LLC.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

© 2018 Baker Hughes, a GE company LLC - All rights reserved.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your BHGE representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes, a GE company. The GE Monogram is a trademark of the General Electric Company.

GEA18713C 12/2018

**BAKER
HUGHES**
a GE company

